

# ALU PARTY



## ALU PARTY TENT

For parties, weddings and events with an open aspect, De Boer's Alu Party tent is ideal. Versatility and distinction are features of the Party tent. The structure is fitted with PVC side curtains throughout, which can be drawn open as desired. In fair weather you can use the Party tent as a single large covering, so your guests can move easily in and out. In bad weather the tent can be closed on all sides, while it still offers optimum freedom of movement. The side walls can be made with decorative PVC arched windows, to give a clear view outdoors. This feature accentuates the intimacy of the tent and lends atmosphere and character.

The Party tent has a clearspan, that is, there are no obstacles within the space. The structure is free- standing and has no tension ropes. In short, it is a party tent with countless possibilities.

### FLEXIBILITY THANKS TO A MODULAR STRUCTURE

The Alu Party tent comes in fixed widths of 5, 7.5 and 10 metres. A unique modular system allows the Alu Party tent to be extended in 4 metre increments into a party tent made to measure. In this way you can decide on the size of your personal party pavilion. The tent is available with an optional wooden floor system. It is even possible for De Boer specialists to erect the Alu Party tent over obstacles in your garden, such as a pond or swimming pool. An Alu Party tent can also easily be built against a house or business premises. In this way tasteful and substantial additions can be made to existing accommodation.

### COMFORT AND ATMOSPHERE

The Party tent can be completely transformed to provide the ambience of your choice. Floor covering, lighting and interior finishing details are available in a wide variety of styles. Party tents can be heated easily and effectively with either air conditioning or gas heating.



### QUALITY AND SAFETY

Typical of all De Boer accommodation is the integrity and safety of all the materials and structures used. Structures meet stringent European requirements, including the German DIN standards. All materials meet the highest European standards for fire safety. All structures are wind tested. In this way De Boer ensures not only stylish accommodation but carefree hospitality as well.

De Boer International B.V.  
Laanenderweg 11 1812 PW Alkmaar  
P.O.Box 446 1800 AK Alkmaar  
The Netherlands

Phone +31 (0) 72 750 11 00  
Fax +31 (0) 72 750 11 99  
www.deboer.com  
international@deboer.com



Specifications may be altered without notification.  
Copyright by De Boer International B.V..

## ALU PARTY TENT



DE BOER COVERS ALL

## ALU PARTY TENT

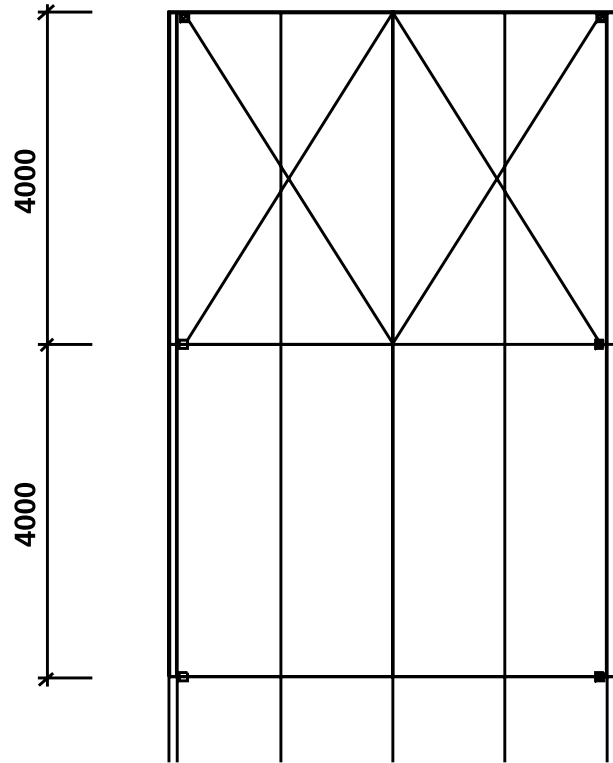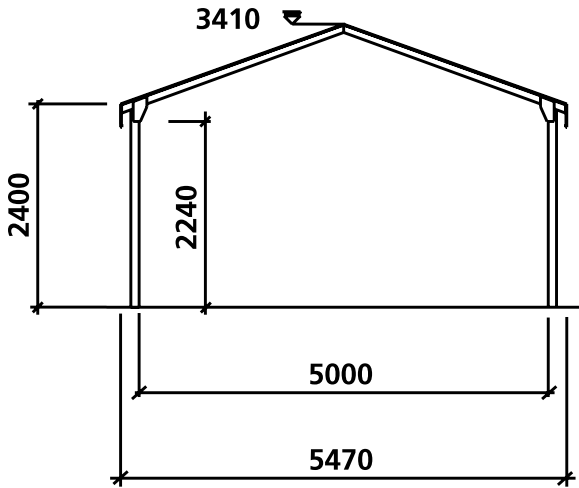

### ALU PARTY TENT P05/ 240/ 4

FRONT AND SIDE CURTAIN	ARCHED WINDOWS	ROOF COVERS	GABLE	FABRIC SEPARATION FABRIC
White	White	White	White	White opaque (light- proof)



If requested, the bearing capacity of the floor can be increased (plate floor 800/ 1000 kg and cassette floor 600/ 700 kg)

Structures available	With and without system floor
Bearing capacity, floor	500kg/m <sup>2</sup>
Connection with other DB structures	Yes
Connection to buildings	Yes
Awning available	Yes
Wall lining/swags and pelmets available	Yes
Optional replacement of wall bracing	Yes

### TECHNICAL SPECIFICATIONS

Incline of roof	20°
Side wall height	2.400
Overall height	3.410
Wind load	0,50KN/m <sup>2</sup>
Snow load	0KN/m <sup>2</sup>
Upright dimension	60 x 80
Roof tensioning system	Spindle
Roof span	Yes
Performance calculations	Yes
German T.U.V. assessor	Yes
Valid assembly manual	Yes

## ALU PARTY TENT

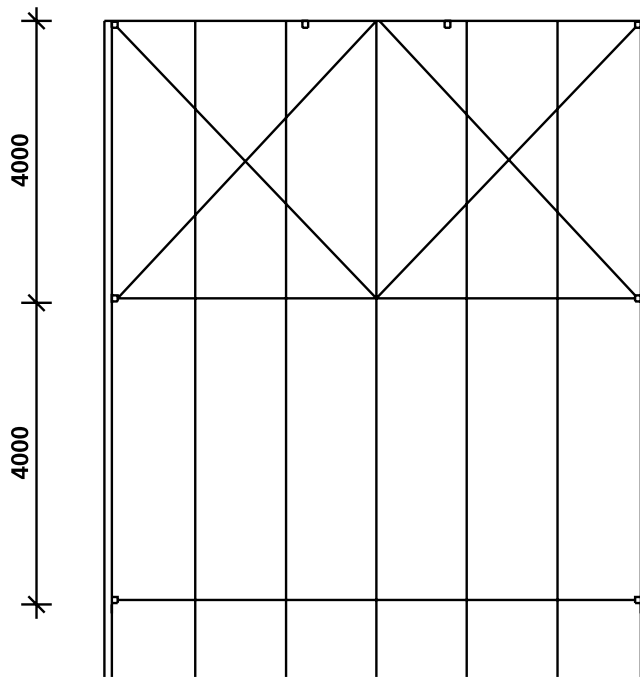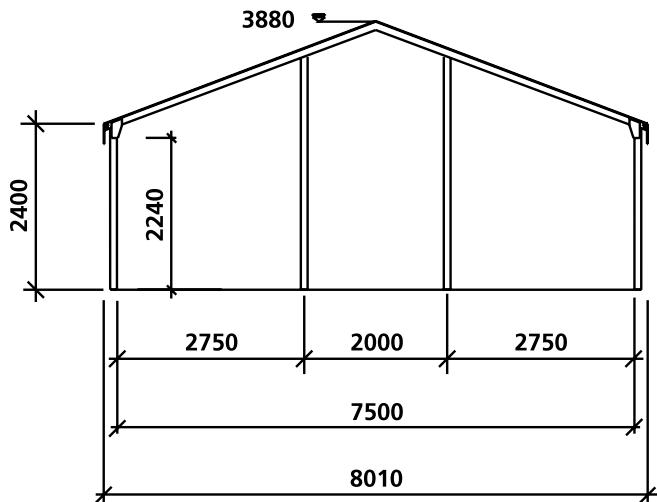

### ALU PARTY TENT P08/ 240/ 4



FRONT AND SIDE CURTAIN	ARCHED WINDOWS	ROOF COVERS	GABLE FABRIC	SEPARATION FABRIC
White	White	White	White	White opaque (light- proof)

If requested, the bearing capacity of the floor can be increased (plate floor 800/ 1000 kg and cassette floor 600/ 700 kg)

Structures available	With and without system floor
Maximum bearing capacity, floor	500kg/m <sup>2</sup>
Connection with other DB structures	Yes
Connection to buildings	Yes
Awning available	Yes
Wall lining/swags and pelmets available	Yes
Optional replacement of wall bracing	Yes
Installation of doors in front:	
- Luxury synthetic door	Yes
- Luxury pushbar/ glass door	Yes
- Locking door	Yes
- Emergency door	Yes

TECHNICAL SPECIFICATIONS	
Incline of roof	20°
Side wall height	2.400
Overall height	3.880
Wind load	0,50KN/m <sup>2</sup>
Snow load	0KN/m <sup>2</sup>
Upright dimension	60 x 80
Roof tensioning system	Spindle
Roof span	Yes
Performance calculations	Yes
German T.U.V. assessor	Yes
Valid assembly manual	Yes

# ALU PARTY TENT

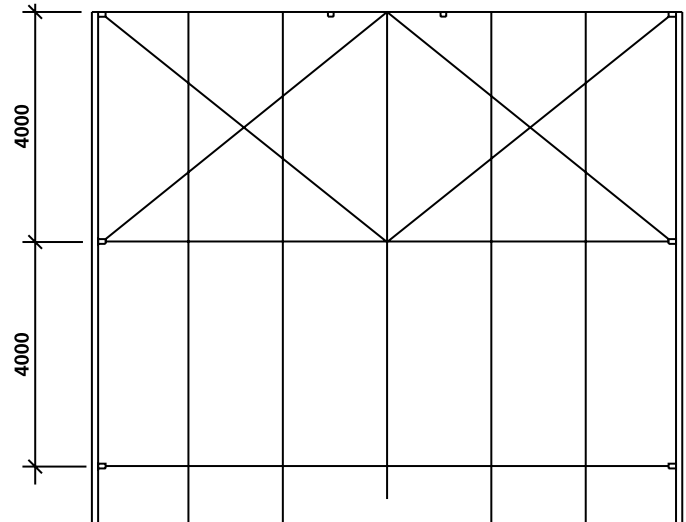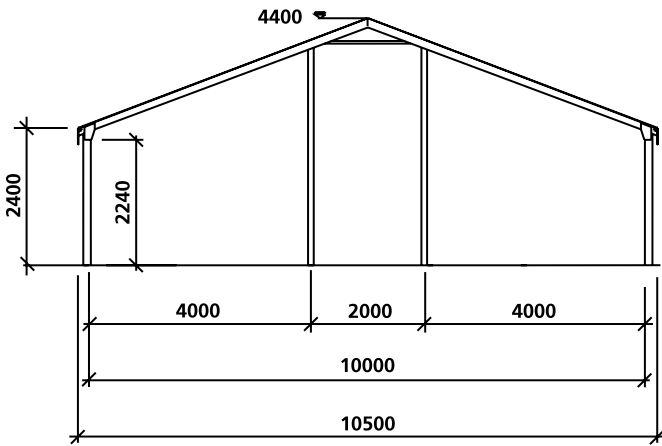

## ALU PARTY TENT P10/ 240/ 4

FRONT AND SIDE CURTAIN	ARCHED WINDOWS	ROOF COVERS	GABLE FABRIC	SEPARATION FABRIC
White	White	White	White	White opaque (light- proof)

If requested, the bearing capacity of the floor can be increased (plate floor 800/ 1000 kg and cassette floor 600/ 700 kg)

Structures available	With and without system floor
Maximum bearing capacity, floor	500kg/m <sup>2</sup>
Connection with other DB structures	Yes
Connection to buildings	Yes
Awning available	Yes
Wall lining/swags and pelmets available	Yes
Optional replacement of wall bracing	Yes
Installation of doors in front:	
- Luxury synthetic door	Yes
- Luxury pushbar/ glass door	Yes
- Locking door	Yes
- Emergency door	Yes

TECHNICAL SPECIFICATIONS	
Incline of roof	20°
Side wall height	2.400
Overall height	4.400
Wind load	0,50KN/m <sup>2</sup>
Snow load	0KN/m <sup>2</sup>
Upright dimension	120 x 120
Roof tensioning system	Spindle
Roof span	Yes
Performance calculations	Yes
German T.U.V. assessor	Yes
Valid assembly manual	Yes