

JUMBO



JUMBO HALL

The name of this structure gives it away: it is gigantic! Its enormous clear span of 30, 40 or 50m allows the erection of a structure the size of a complete stadium. The standard wall height is 4m. The apex height varies from 8 to no less than 12m. The Jumbo can accommodate every event in the utmost comfort. Like the Alu Halls, the Jumbo has a patented roof-tensioning system, which prevents any annoying flapping of the roof covers.

NUMEROUS LARGE-SCALE APPLICATIONS

De Boer Jumbo structures serve the most diverse purposes. These include use as a gigantic event hall, as an exhibition area or for the storage of goods. High quality roller shutter doors can be fitted in the front and rear façades, to create an extra high drive-in opening for trucks.

COMFORTABLE

Through the use of the hard PVC side panels a comfortable area is created with perfect temperature control. The peaks of all Jumbo structures have a ventilation grid system, developed by De Boer, which effects natural ventilation. De Boer has a wide range of options for lining and furnishing the structure.

CUCKOO FOR STILL BETTER VENTILATION

Another special De Boer development is the Cuckoo, which can be fitted to the roof of the Jumbo Hall. This is a raised ventilation grid that provides natural, enhanced extraction of air. This innovative and effective system ensures extra, draught-free air circulation and a delightfully comfortable climate.

QUALITY AND SAFETY

Typical of all De Boer accommodation is the integrity and safety of all the materials and structures used. Structures meet stringent European requirements, including the German DIN standards. All materials meet the highest European standards for fire safety. All structures are wind tested. In this way De Boer ensures not only stylish accommodation but carefree hospitality as well.



De Boer International B.V.
Laanenderweg 11 1812 PW
P.O.Box 446 1800 AK Alkmaar
The Netherlands



Phone +31 (0) 750 11 00
Fax +31 (0) 750 11 99
www.deboer.com
international@deboer.com

Specifications may be altered without notification.
Copyright by De Boer International B.V..

JUMBO HALL



JUMBO HALL

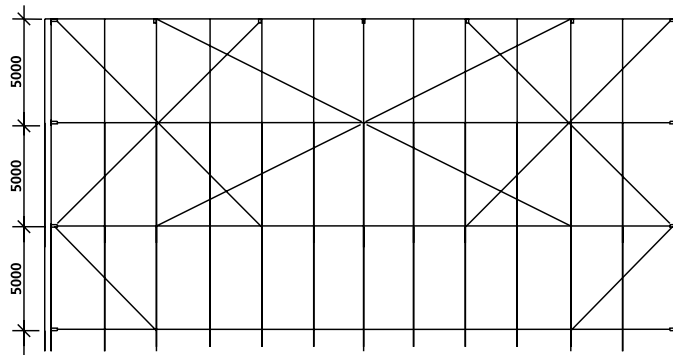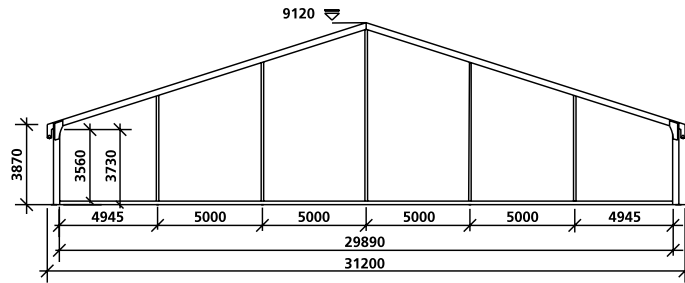



EURO JUMBO PAVILION A 30/ 400/ 5

SIDE PANELS	ROOF COVERS	GABLE FABRIC
White	White	Blue
White	Blue	Blue
	(light- proof)	(light- proof)
White	White/ opaque (light- proof)	White/ opaque (light- proof)

If requested, the bearing capacity of the floor can be increased (plate floor 800/ 1000 kg and cassette floor 600/ 700 kg)

Structures available	With and without system floor	TECHNICAL SPECIFICATIONS	
Maximum bearing capacity, floor	500kg/m ²	Incline of roof	18°
Connection with other DB structures	Yes	Side wall height	3.870
Connection to buildings	Yes	Overall height	9.120
Light- proof fabric available	Yes	Wind load	0,50KN/m ²
Awning available	Yes	Snow load	0KN/m ²
Wall lining/swags and pelmets available	Yes	Truss profile	120*300
Roof ventilation (cuckoo) available	Yes	Roof tensioning system	Unique roll-up system
Installation options for:		Roof overhang	Yes
- Luxury synthetic door	Yes	Performance calculations	Yes
- Luxury pushbar/glass door	Yes	German T.U.V. assessor	Yes
- Arched windows	Yes	Valid assembly manual	Yes
- Side curtains	Yes		
- Locking door	Yes		
- Emergency door	Yes		

JUMBO HALL

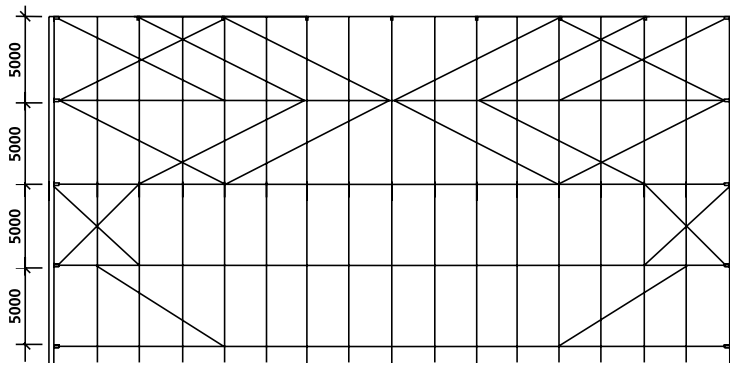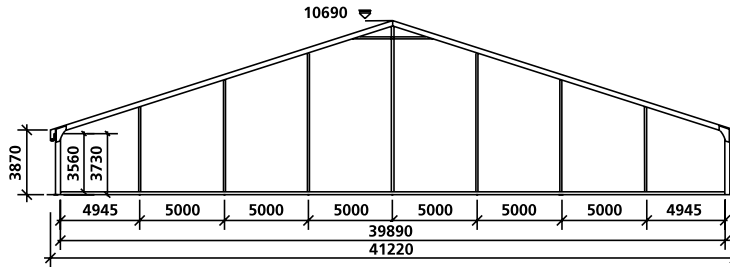



EURO JUMBO PAVILION A 40/ 400/ 5

SIDE PANELS	ROOF COVERS	GABLE FABRIC
White	White	Blue
White	White/ opaque (light- proof)	White/ opaque (light- proof)

If requested, the bearing capacity of the floor can be increased (plate floor 800/ 1000 kg and cassette floor 600/ 700 kg)

Structures available	With and without system floor	TECHNICAL SPECIFICATIONS	
Maximum bearing capacity, floor	500kg/m ²	Incline of roof	18°
Connection with other DB structures	Yes	Side wall height	3.870
Connection to buildings	Yes	Overall height	10.690
Light- proof fabric available	Yes	Wind load	0,50KN/m ²
Awning available	Yes	Snow load	0KN/m ²
Wall lining/swags and pelmets available	Yes	Truss profile	120*300
Roof ventilation (cuckoo) available	Yes	Roof tensioning system	Unique roll-up system
Installation options for:		Roof overhang	Yes
- luxury synthetic door	Yes	Performance calculations	Yes
- luxury pushbar/glass door	Yes	German T.U.V. assessor	Yes
- arched windows	Yes	Valid assembly manual	Yes
- side curtains	Yes		
- locking door	Yes		
- emergency door	Yes		

JUMBO HALL

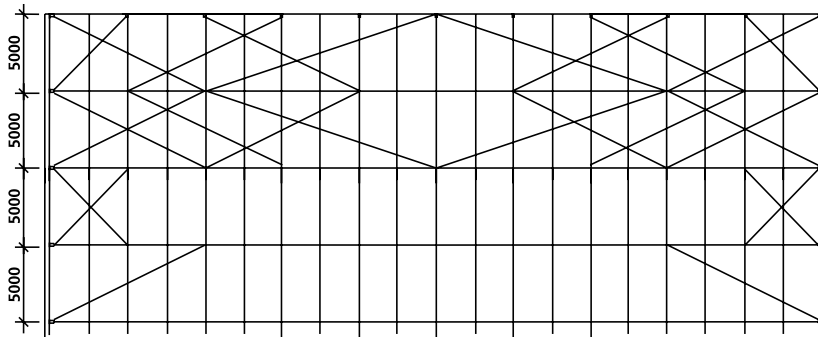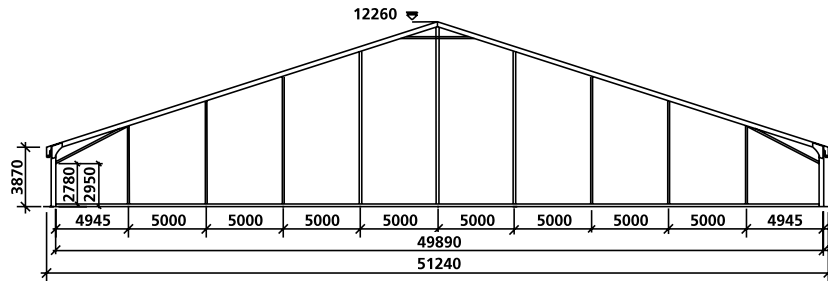

EURO JUMBO PAVILION A 50/ 400/ 5

SIDE PANELS	ROOF COVERS	GABLE FABRIC
White	White	Blue
White	White/ opaque (light- proof)	White/ opaque (light- proof)

If requested, the bearing capacity of the floor can be increased (plate floor 800/ 1000 kg and cassette floor 600/ 700 kg)

Structures available	With and without system floor	TECHNICAL SPECIFICATIONS	
Maximum bearing capacity, floor	500kg/m ²	Incline of roof	18°
Connection with other DB structures	Yes	Side wall height	3.870
Connection to buildings	Yes	Overall height	12.260
Light- proof fabric available	Yes	Wind load	0,50KN/m ²
Awning available	Yes	Snow load	0KN/m ²
Wall lining/swags and pelmets available	Yes	Truss profile	120*300
Roof ventilation (cuckoo) available	Yes	Roof tensioning system	Unique roll-up system
Installation options for:		Roof overhang	Yes
- luxury synthetic door	Yes	Performance calculations	Yes
- luxury pushbar/glass door	Yes	German T.U.V. assessor	Yes
- arched windows	Yes	Valid assembly manual	Yes
- side curtains	Yes		
- locking door	Yes		
- emergency door	Yes		