




# Pyramid

## 2006 3x3

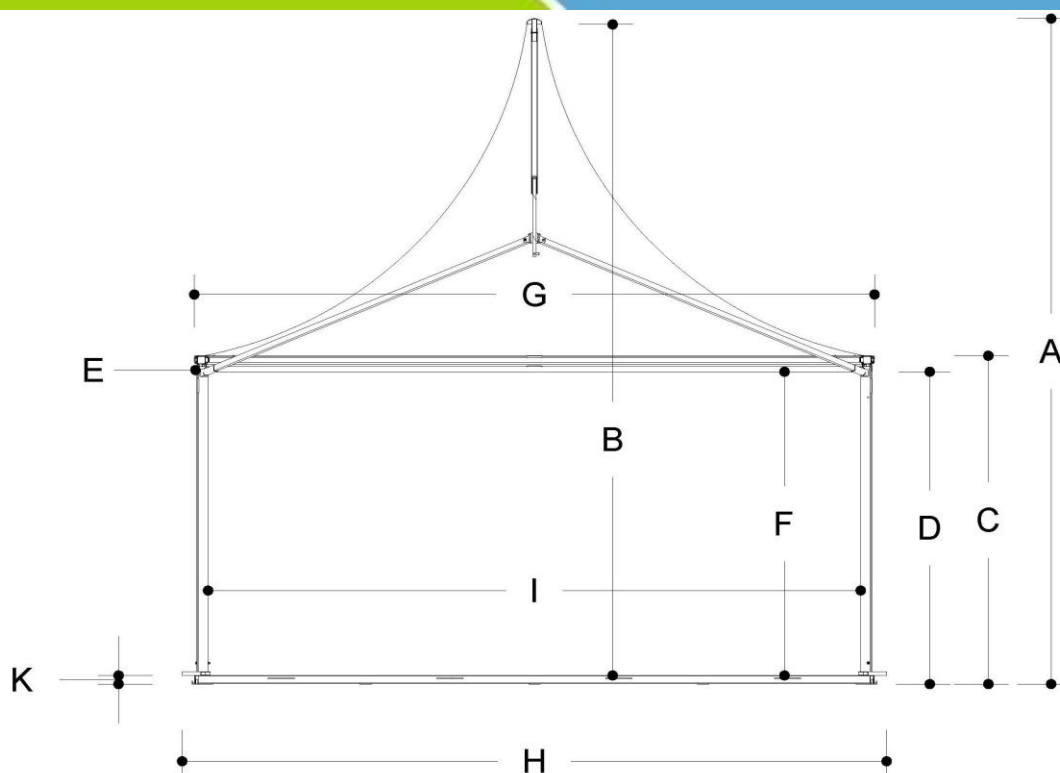



### Technical data

	(mm)			
A	External ridge height	4176	Wind load	0,30 kN/m <sup>2</sup>
B	Internal free ridge height	2776	Snow load	0 KN/m <sup>2</sup>
C	External side height	2332	Bearing capacity standard floor	500kg/m <sup>2</sup>
D	External free height	2332	Column profile	Ø63
E	Roof overhang	0	Maximum roof load	max. 60kg in the apex
F	Internal free side height	2200	Mounting points in structure	Columns and rafters
G	External width of the roof	3031	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
H	Maximum width ground level	3400		
I	Internal width between columns	2833		
J	Bay distance	0		
K	Floorheight	150		



# Pyramid

## 2006 3x3

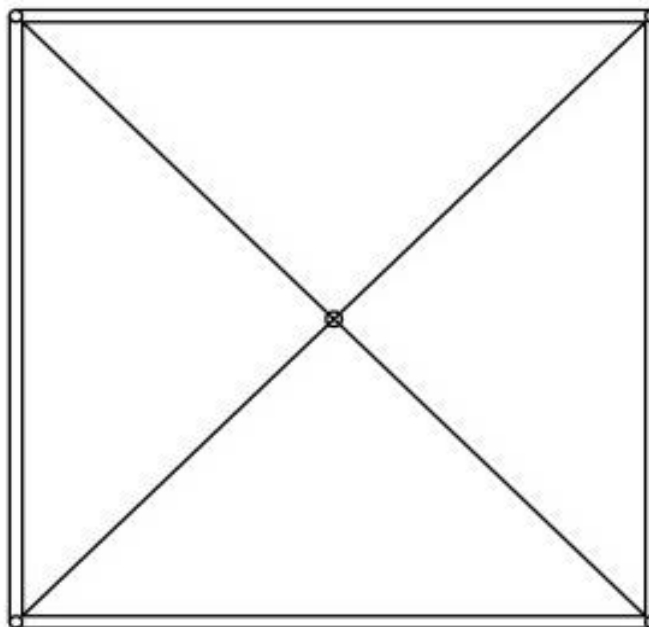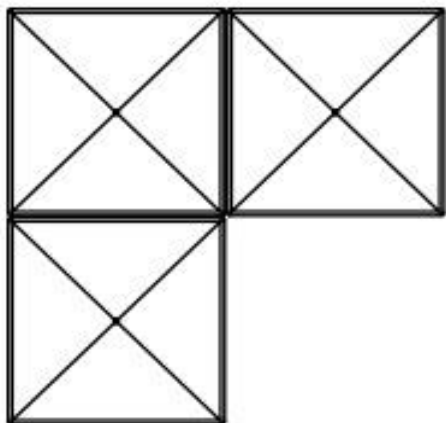

### Options

Available roof covers      White opaque roof cover

Available floors      Cassette floor  
Plate floor  
Antiskid cassette floor

Available doors      Aluminium push bar door 2m (blind)  
Aluminium push bar door 2m (glass)  
Emergency door

Available side curtains and side panels      PVC side curtains  
PVC side curtains with arched windows

Roof insulation      No

Insulation side panels      No


Connection to permanent buildings      Yes

Connection to other Losberger De Boer structures      Yes



# Pyramid

# 2004 4x4

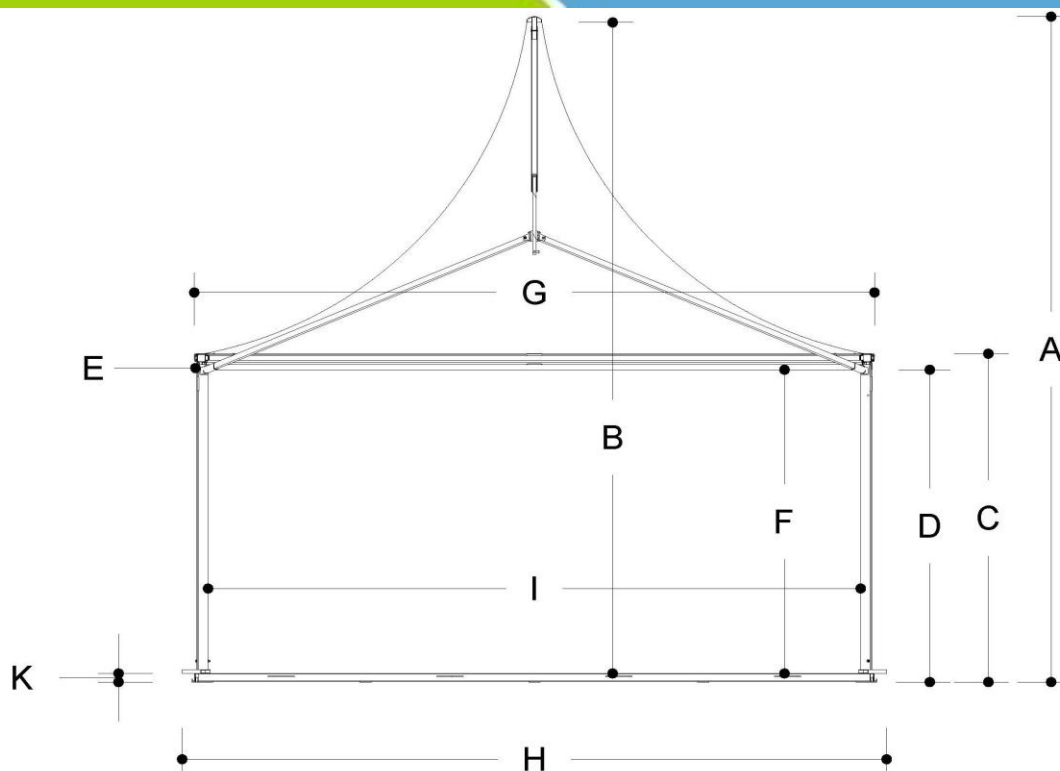



## Technical data

	(mm)			
A	External ridge height	4494	Wind load	0,30 kN/m <sup>3</sup>
B	Internal free ridge height	3094	Snow load	0 KN/m <sup>2</sup>
C	External side height	2332	Bearing capacity standard floor	500kg/m <sup>2</sup>
D	External free height	2332	Column profile	Ø63
E	Roof overhang	0	Maximum roof load	max. 60kg in the apex
F	Internal free side height	2200	Mounting points in structure	Columns and rafters
G	External width of the roof	4031	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
H	Maximum width ground level	4400		
I	Internal width between columns	3833		
J	Bay distance	0		
K	Floorheight	150		



# Pyramid

# 2004 4x4

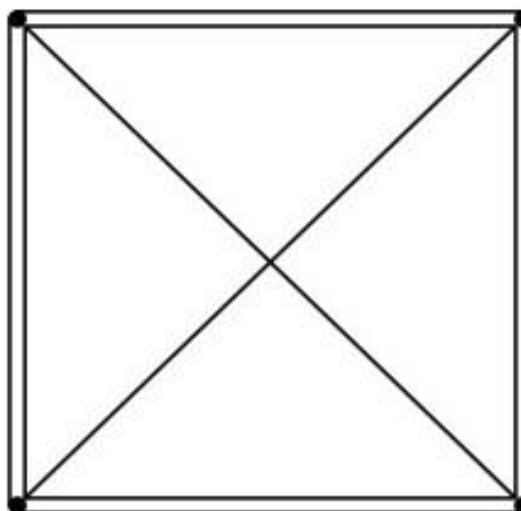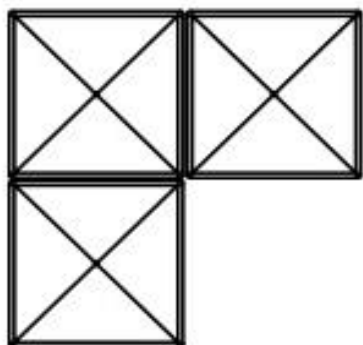

## Options

Available roof covers      White opaque roof cover

Available floors              Cassette floor  
   Plate floor  
   Antiskid cassette floor

Available doors              Aluminium push bar door 2m  
   (blind)  
   Aluminium push bar door 2m  
   (glass)  
   Emergency door

Available side curtains and  
side panels                      PVC side curtains  
   PVC side curtains with arched  
   windows

Roof insulation                      No

Insulation side panels              No


Connection to permanent  
buildings                              Yes

Connection to other  
Losberger De Boer structures      Yes



# Pyramid

# 2004 5x5

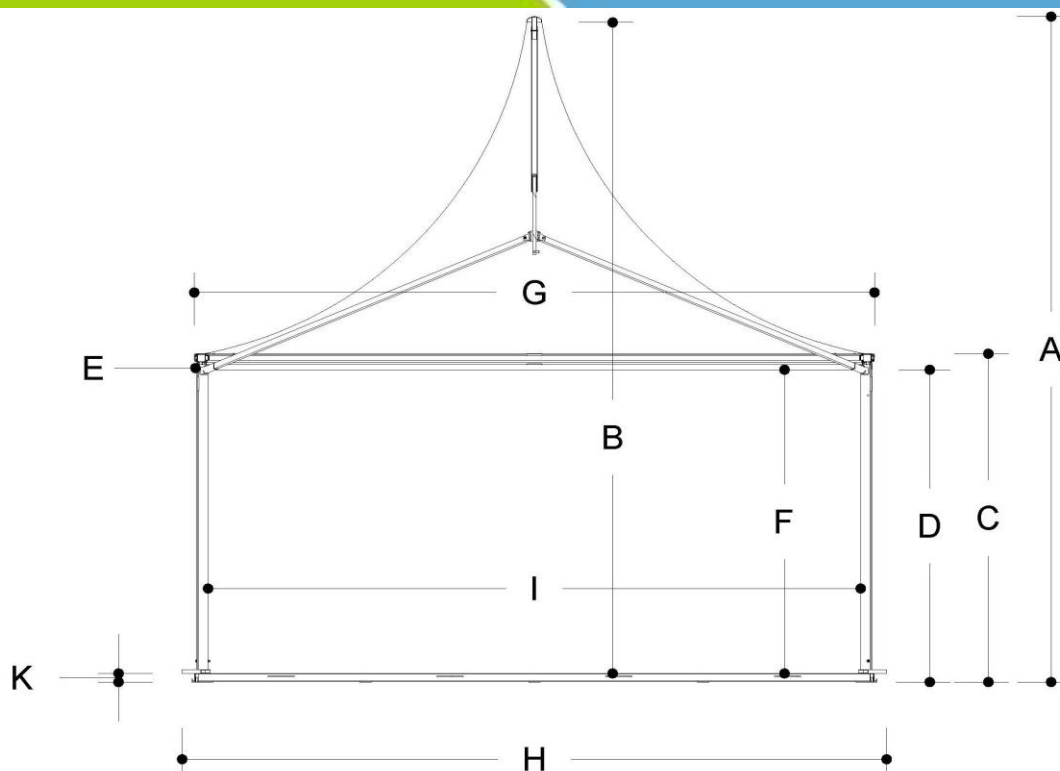



## Technical data

		(mm)		
A	External ridge height	4986	Wind load	0,30 kN/m <sup>4</sup>
B	Internal free ridge height	3586	Snow load	0 KN/m <sup>2</sup>
C	External side height	2332	Bearing capacity standard floor	500kg/m <sup>2</sup>
D	External free height	2332	Column profile	Ø63
E	Roof overhang	0	Maximum roof load	max. 60kg in the apex
F	Internal free side height	2200	Mounting points in structure	Columns and rafters
G	External width of the roof	5031	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
H	Maximum width ground level	5400		
I	Internal width between columns	4833		
J	Bay distance	0		
K	Floorheight	150		



# Pyramid

## 2004 5x5

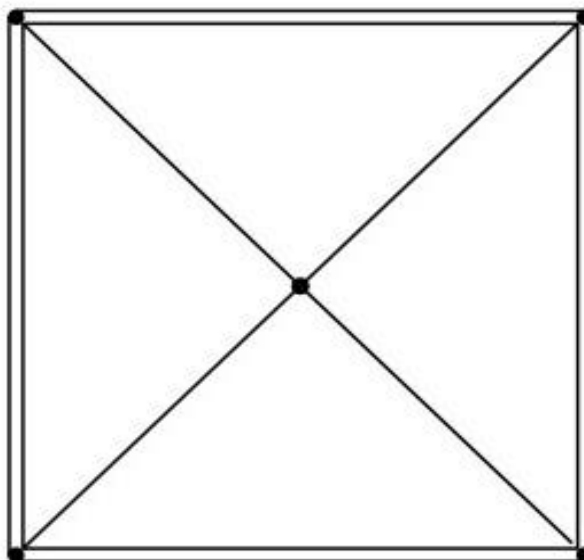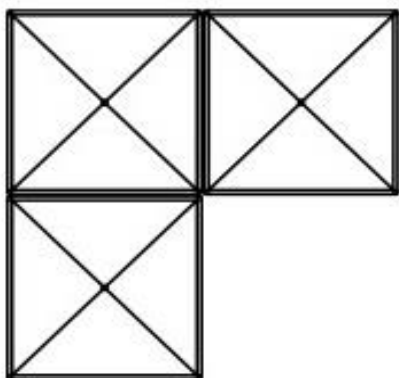

### Options

Available roof covers      White opaque roof cover

Available floors      Cassette floor  
Plate floor  
Antiskid cassette floor

Available doors      Aluminium push bar door 2m (blind)  
Aluminium push bar door 2m (glass)  
Emergency door

Available side curtains and side panels      PVC side curtains  
PVC side curtains with arched windows

Roof insulation      No

Insulation side panels      No


Connection to permanent buildings      Yes

Connection to other Losberger De Boer structures      Yes



# Pyramid

# 2004 6x6

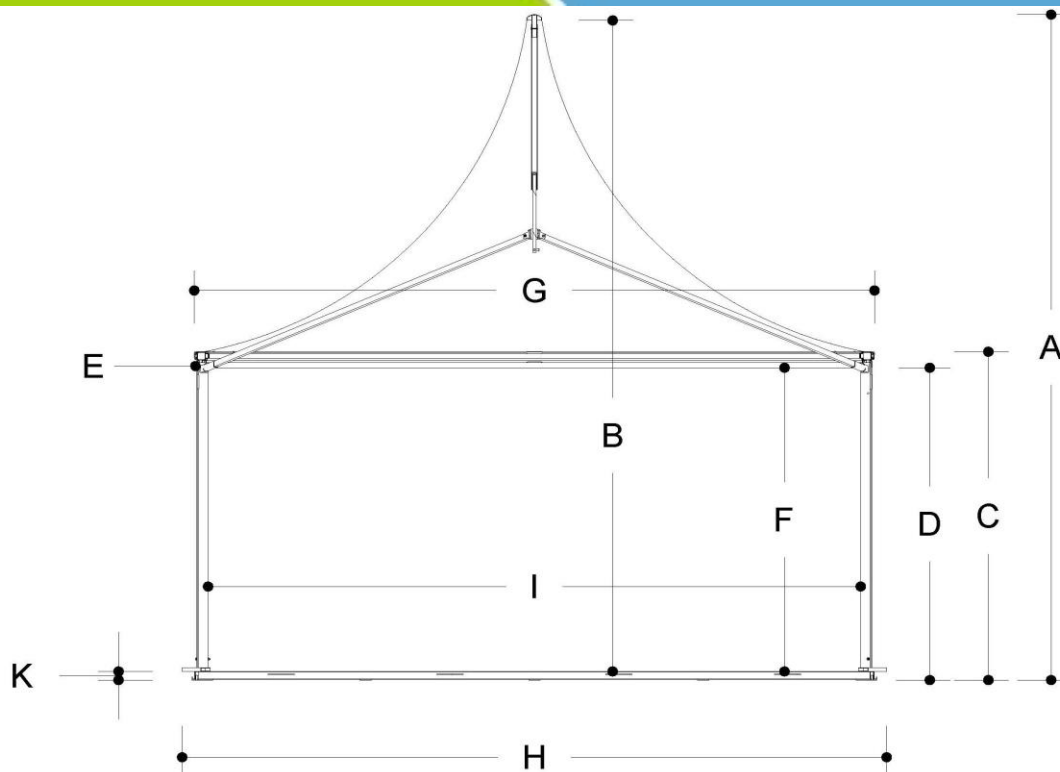



## Technical data

	(mm)			
A	External ridge height	5780	Wind load	0,30 kN/m <sup>5</sup>
B	Internal free ridge height	4380	Snow load	0 KN/m <sup>2</sup>
C	External side height	2332	Bearing capacity standard floor	500kg/m <sup>2</sup>
D	External free height	2332	Column profile	Ø63
E	Roof overhang	0	Maximum roof load	max. 60kg in the apex
F	Internal free side height	2200	Mounting points in structure	Columns and rafters
G	External width of the roof	6031	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
H	Maximum width ground level	6400		
I	Internal width between columns	5833		
J	Bay distance	0		
K	Floorheight	150		



# Pyramid

## 2004 6x6

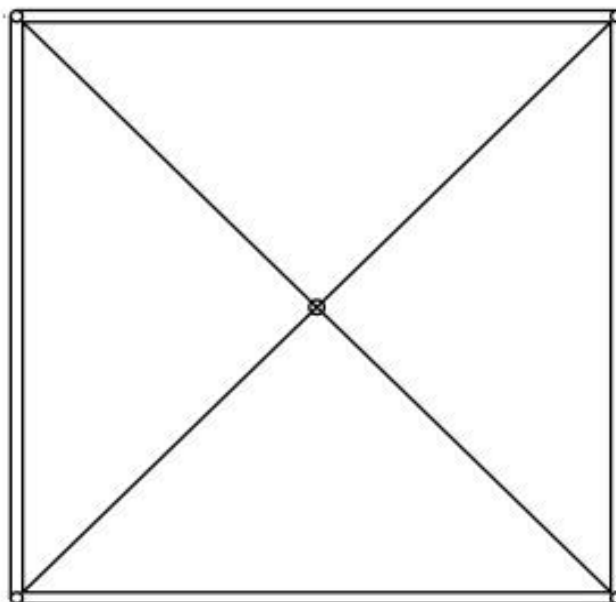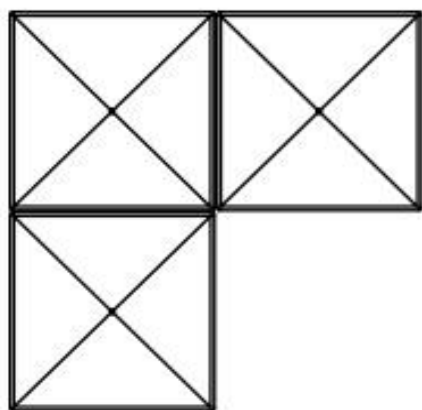

### Options

Available roof covers      White opaque roof cover

Available floors      Cassette floor  
Plate floor  
Antiskid cassette floor

Available doors      Aluminium push bar door 2m (blind)  
Aluminium push bar door 2m (glass)  
Emergency door

Available side curtains and side panels      PVC side curtains  
PVC side curtains with arched windows

Roof insulation      No

Insulation side panels      No

Connection to permanent buildings      Yes

Connection to other Losberger De Boer structures      Yes